


Thank you for purchasing our product.
Please read this User's Manual before
using the product. Change without Notice

IR CCD COLOR DOME CAMERA



CONTENT TABLE

CONTENT TABLE.....	2
FCC STATEMENT.....	3
SAFETY PRECAUTIONS.....	4
FUNCTION.....	5
Light Sensor	5
LENS	5
IR LED	5
Power and Video Output Jack.....	6
Zoom / Focus	7
INSTALL STEP.....	7
SPECIFICATIONS	8
DIMENSION.....	9

FCC STATEMENT

WARNING

This device complies with Part 15 FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received including interference that may cause undesired operation."

* Federal Communications Commission (FCC) Statement

WARNING

This Equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the ser is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

* You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

SAFETY PRECAUTIONS

Please read before using



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of insulated dangerous Voltage within the product's enclosure that may be sufficient magnitude to constitute risk of electrical shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operation and maintenance (servicing) instructions in the literature accompanying the appliance.

1. Please read the service manual in details before using.
2. Don't try to disassemble the chassis or the part easily , in case that touch the power by mistake , is shocked by electricity the danger or caused inside parts to be damaged ,
3. Do not attempt to service this unit yourself unless you are authorized to do so. Opening cover may exposure you to dangerous voltage or other hazards. Refer all servicing to qualified personnel only.
4. When being regular, please lock the parts firmly first to prevent the machine damage.
5. Please connect correctly in accordance with the regulation , prevent the machine from using , or striking improperly.
6. Please don't use any organic solution or the corrosively sanitizer to insert and wipe away the chassis outside . While inserting and wiping away, please turn off the power , and use the clean cloth is stained with letting a small amount of branch water, insert and wipe away appearance.
7. Please don't use the camera under the following abominable environments. Temperature is lower than- 10 degrees Centigrade, or is higher than +50 degrees Centigrade.


FUNCTION

The camera includes auto white balance mode(AWB)
 › auto capture and color temperature.
 The range is 2400°K~9600°K °

Light Sensor :


Auto Cell Device Sensor, the IR LED would on when night comes to make up lightness. IR LED would not on in the day, to reduce power consumption.

Light Sensor




LENS : Super sensitivity sensor lens .

LENS



IR LED : Super power LED IR light


IR LED



5

Power and video output JACK :

DC JACK is for the power in, it is necessary to use a constant voltage adapter , F(BNC) JACK is for video input.




F(BNC) JACK VIDEO
Video Output

DC JACK
DC 12V Power In

6

Zoom / Focus Function : (Apply on Vari focal model only)

Zoom



Focus

Zoom:

Adjust vari focal lens zoom in zoom out if object is out of focus.

Focus:

Focus available adjustment if object is out of focus.

INSTALL STEPS

1. Make the camera on the bracket stable.
2. Then connect the 75Ωcoaxial cable to device video in.
3. Put the power cable on.
4. Users may adjust the camera position and angle in different environment.

Notice : The camera lens is already make it on right focus, user can adjust it if in need.

7


SPECIFICATION

Horizontal Resolution	530 TV Lines	420 TV Lines	420 TV Lines
Pick up device	1/3" INTERLINE transfer CCD		
Total Pixels	NTSC:811(H) x 508(V) PAL:795(H) x 596(V)	NTSC:537(H) x 505(V) PAL:537(H) x 597(V)	
Effective Pixels	NTSC:768(H) x 494(V) PAL:752(H) x 582(V)	NTSC:510(H) x 492(V) PAL:500(H) x 582(V)	
Sync. system	2 : 1 Internal		
Scanning system	NTSC: 525 lines / 60 Fields PAL :625 lines / 50 Fields		
Video Output	1.0 Vp-p / 75 ohm composite		
Electronic Shutter	Auto 1/60 (1/50)~1/100,000 sec.		
Lens	Vari Focal Lens : 3.5 mm -8 mm		Board Lens: Standard:4.3 mm (6 mm optional)
S/N Ratio	More than 48dB (AGC OFF)		
Min. Illumination	0.5 lux color/ F2.0	0.3 lux color/ F2.0	0.4 lux color/ F2.0
IR Distance	20M (28pcs IR LED)	20M (28pcs IR LED)	10M (14pcs IR LED)
IR Trigger	3.1 lux / 3.7 lux IR ON / OFF		2.6 lux / 2.7 lux IR ON / OFF
Power Supply	DC 12V		
Power Consumption	6.2W (Max)	5.9W (Max)	3.5W (Max)
Current	520mA (Max)	490mA (Max)	290mA (Max)
Dimension	82.5mm (H) x 119mm (Diameter)		69mm (H) x 94mm (Diameter)
Operating Temp	-10 to 50℃ (14 to 122 F)		
Storage Temp	-20 to 70℃ (-4 to 158 F)		

8

DIMENSION

Type A / Type B

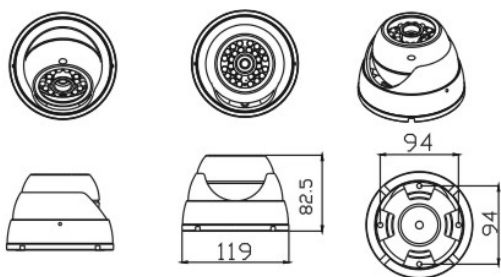

Type C

